


Electrical Test:

1. 100% Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot: 300V DC/10ms

Pin Assignment

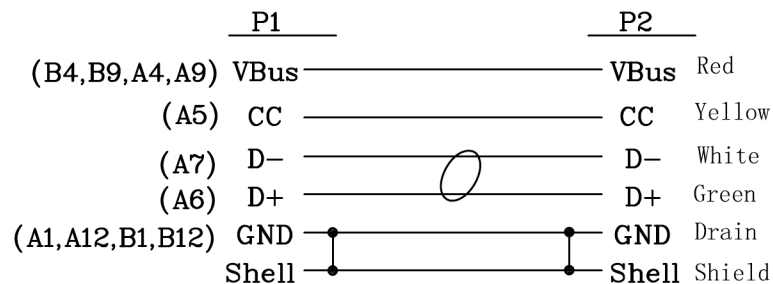

NO	DESCRIPTION	Q'TY	UNIT	TOLERANCE			TITLE:	CUSTOMER :	CUSTOMER P/N :	DRAWING NO.:	REV.
				INCHES	M/M	M/M					
6	Metal DOWN Cap	1	pcs	.X	.015	.30	USB2.0 Type Cable C TO C White L=0.5M	CPC	PSG91489	C06026-00272	A01
5	Metal UP Cap	1	pcs	.XX	.010	.10					
4	45P Color:White PVC	12	g	.XXX	.005	.05					
3	Inside Molding:Polyamide Resin	1	g	DRAWN BY 邱建联			SCALE	NONE	DRAWING NO.:	1/2	
2	TYPEC-USB2.0 C Type Connector With PCB,Insulation:White,Shell Nickel Plated	2	pcs	CHECK BY			UNIT	MM			
1	NO-UL 32AWG(7/0.08TC)*1P+32AWG(7/0.08TC)*1C+24AWG(26/0.1TC+250Dnylon)*1C+3E(19/0.05TC+250Dnylon)+AB(16/9/0.06TC 95%)OD:3.0MM WHITE PVC NO MARKING	AR	m	APPD BY			DATE	2017.05.02			